








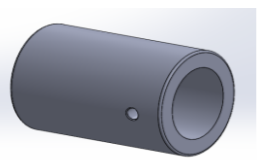









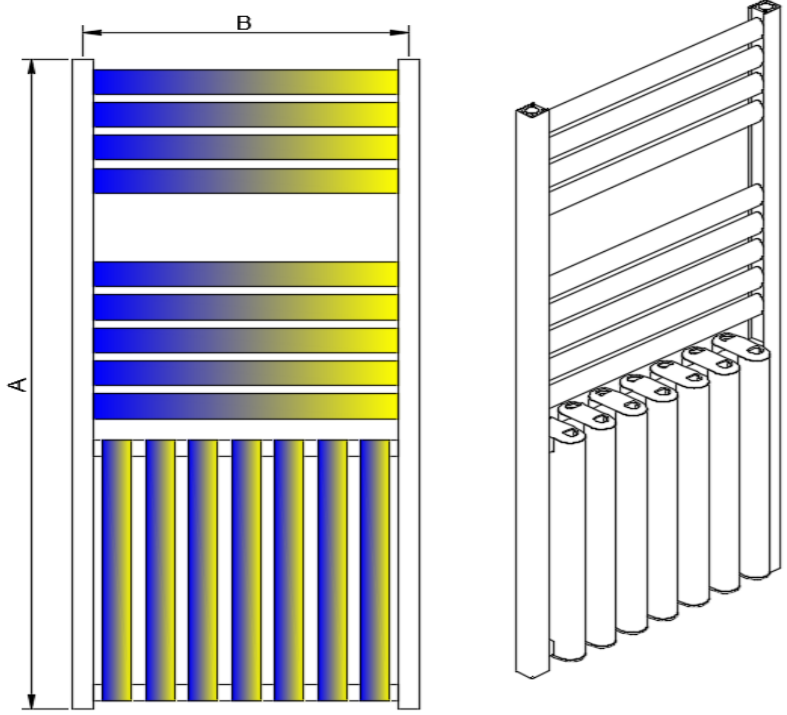



# BURTON INSTALLATION GUIDE

This product must be fitted only by a fully qualified installer.

DESCRIPTION	DESCRIPTION	ILLUSTRATION
 <p>RADIATOR x 1</p>	Fixing choose the appropriate fixing for the wall material if required	
	PTFE tape	
	Electric drill	
	Masonry drill bit appropriate to the fixings	
	Adjustable spanner	
 <p>BOTTOM - RIGHT CLIPS x 1</p>	 <p>BOTTOM - LEFT CLIPS x 1</p>	
 <p>RADIATOR BRACKETS x 2</p>	 <p>WALL BRACKETS x 2</p>	Flat head and philips head screw drivers
 <p>FIXING BRACKETS x 2</p>	 <p>BRACKET COVER x 2</p>	1 lock shield valve and 1 gate or thermostatic valve
 <p>END PLUG x 1</p>	 <p>RAD. SCREWS x 2</p>	 <p>WALL SCREWS x 6</p>
 <p>AIR VENT x 1</p>	 <p>WALL ANCHORS x 6</p>	 <p>FIXING SCREWS x 2</p>
<b>GENERAL RECOMMENDATION</b>		
<ul style="list-style-type: none"> <li>- Before fitting the radiator it is necessary to wash out the heating system to remove any existing mud, scale, work residues, traces of flux, oil, etc.</li> <li>- When the system water pH is outside the 5,5-8,5 range and/or when the dissolved is above 0,1mg/liter, it is always needed to protect the heating system components (the radiator is one of these) with a proper chemical treatment compatible with all parts in contact with water (silicon rubber too).</li> <li>- In order to fit the radiator to the wall, it is necessary to choose the proper fixings for the wall material.</li> <li>- If the system water exceeds 50°C, please install a warning mark near the radiator to avoid any accidental scalding.</li> <li>- Clean the radiator surface only with a soft cloth to avoid scratching the finish and do not use chemical againts during cleaning operations. It is prohibited to climb onthe radiator.</li> <li>- Maximum working temperature 95°C, maximum working pressure 4 bar.</li> </ul>		

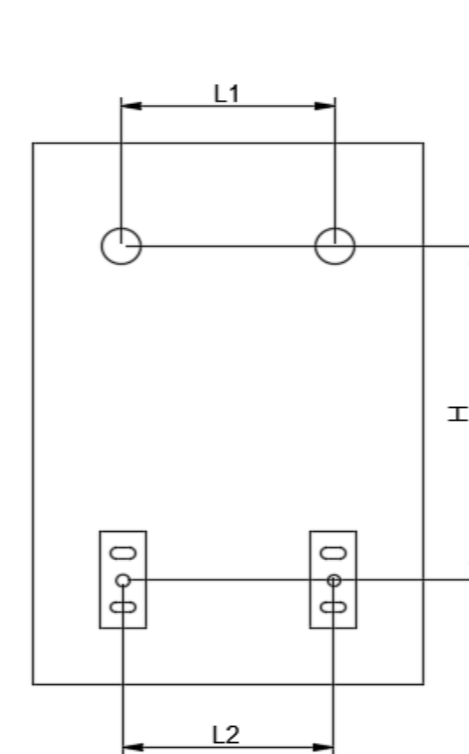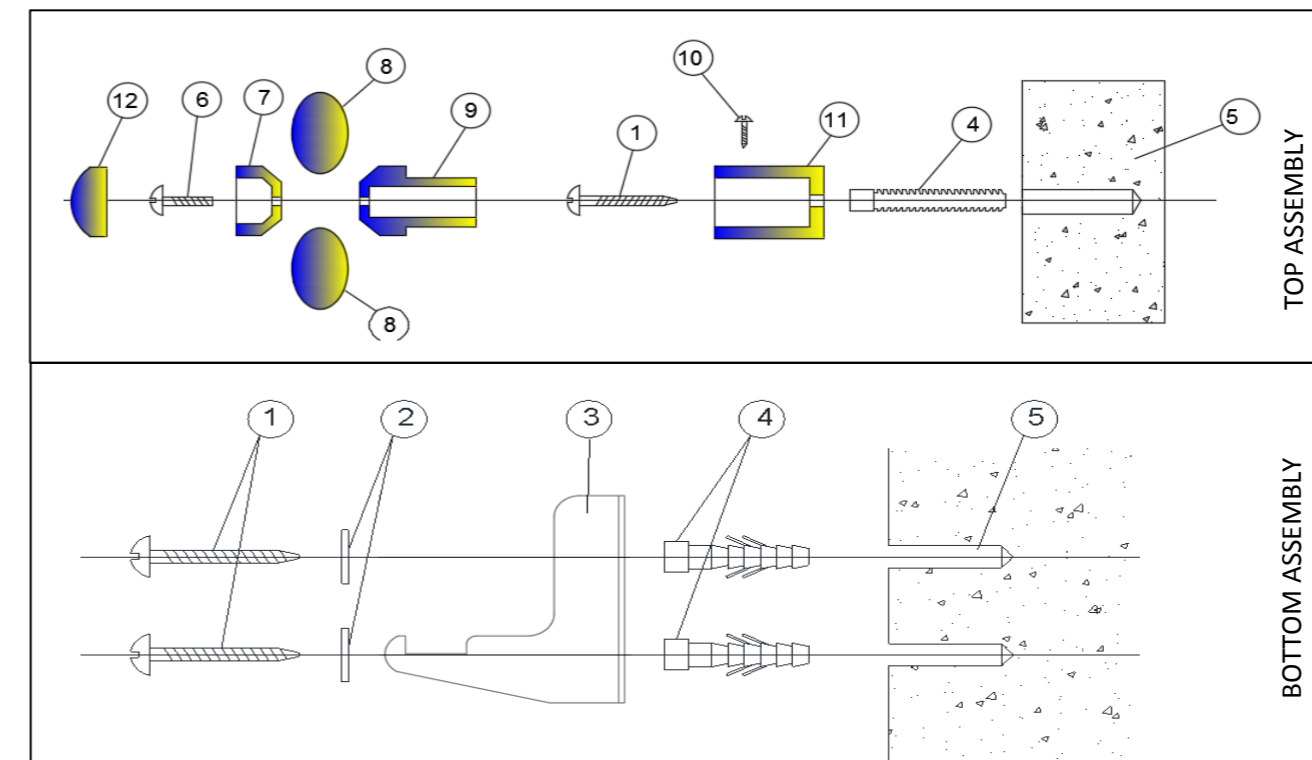

1	WALL SCREW
2	WASHERS
3	BOTTOM BRACKET
4	WALL ANCHORS
5	WALL
6	RADIATOR SCREW
7	FIXING BRACKET
8	RADIATOR
9	TOP BRACKET
10	FIXING SCREW
11	WALL BRACKET
12	COVER

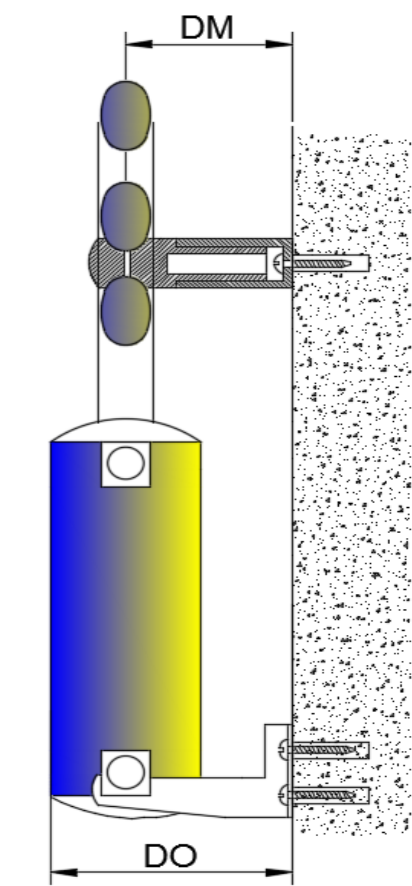

NAMES	A	B	TUBE (QTY)	DM	DO	H	L1	L1
BURTON	1180	455	16	68	116	1063	355	260