


ORNE AND RANCE TOWEL RAIL INSTALLATION GUIDE

Please read these instructions carefully before instalation and operation

- 1.This Towel Rail is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the Towel Rail by a person responsible for their safety.
- 2.In order to avoid a hazard, this Towel Rail must be installed so that the bottom rail is at least 600mm above the floor.
- 3.This Towel Rail is intended to warm and dry towels and therefore is hot to the touch.
- 4.The towel rail is to be installed so that switches and other controls cannot be touched by a person in the bath or shower.
- 5.To avoid a hazard this towel rail must not be used to hold towels or any other articles that have been in contact with oil, petroleum based products or dry cleaning fluids.
- 6.Use this Towel Rail only with the voltage specified on the rating label.
- 7.Do not immerse in liquid or allow liquid to run into the interior of the Towel Rail. Indoor use only.
- 8.Do not operate this towel rail if damaged or after the Towel Rail malfunctions or has been dropped or damaged in any manner. Return to a qualified electrical person for examination, electrical service or repair.
- 9.Use this Towel Rail only as described in this manual. Any other use is not recommended by the manufacturer and may cause fire, electrical shock or injury.
10. Do not use this Towel Rail in a window as rain may cause electric shock.

TOOLS REQUIRED

Pencil
Hammer
Measuring Tape
Spirit level
Electric drill
Screw driver

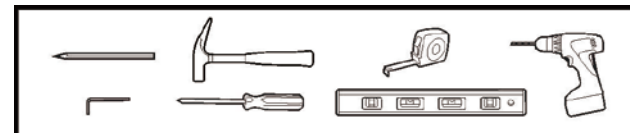


ACCESSORIES

Wall anchors x4		Applied models	
Screws x4		ORNE	RANCE
Decorative cap x2		 	
Mounting leg x2			

Code	Size	Power	Voltage
ORNE	760*580CM	50W	220-240VAC, 50HZ
RANCE	500*475CM	40W	220-240VAC, 50HZ


lease follow the below installation steps to complete the towel rail installation

Step 1




Unthread the cap to see the visible mounting seat, level the installation mounting size and mark installation holes by pencil

Step 2




Make the holes with an electric driller

Step 3




Use a hammer to knock plastic wall anchor into wall completely

Step 4



Insert long screw through mounting bracket , then screw into the plastic wall anchor with a screw driver

Step 5



Thread the decorative cap to the mounting seat